

FP ATS-9900 & FP ATS-9950

KEY ADVANTAGES

Fast and versatile, these top-of-the-line, high-end tabletop labelers/tabbers handle up to 35,000 pcs./hr. and up to three tabs in one pass. They apply clear, translucent, or paper tabs with ease in a variety of tab sizes and can apply labels up to 4" wide. An innovative side tab application allows maximum productivity – simply load large tab rolls and jobs keep running.

SPECIAL FEATURES

- Production speeds of up to 35,000 pcs./hr; double tab at 30,000 pcs./hr.
- Applies tabs, labels, or USPS® stamps one, two, or three at a time
- Available in a console model (FP ATS-9950)
- Optional CD-860 conveyor-stacker and drop tray



SPECIFICATIONS

Speed	Single Tab: Up to 35,000 pcs./hr. Double Tab: Up to 30,000 pcs./hr. Triple Tab: Up to 25,000 pcs./hr.
Material Size	Minimum 5.0" W x 3.0" L Maximum 17.0" W x 13.0" L
Material Thickness	Up to 1/2"
Tab Size	Minimum 3/4" W x 3/4" L Maximum 2" W x 2" L
Labels	Up to 4" wide backing paper w/supplied wide applicator head
Roll Size	Up to 19.5" diameter (3" core)
Number of Tabs	1, 2, or 3
Tab Accuracy	+/- 1/16"
Dimensions	27" W x 33" D x 29" H (FP ATS-9900) 27" W x 33" D x 71" H (FP ATS-9950)
Weight	200 lbs.
Console Weight	265 lbs.
Electrical	115VAC 50/60Hz
Duty Cycle	120 million pieces total or 2,000,000 pcs./mo. (5-year life)



PHONE: WV 304.232.1755
PA 724.695.1133
Toll Free 866.944.MAIL (6245)

FAX: 304.232.1899

EMAIL: sales@amasti.com
www.amasti.com


www.amasti.com

Call your FP representative today to order your FP Tabbing & Labeling Systems, and ask about our family of mailing systems and solutions.


When you have questions, we have solutions. Our commitment to fast, attentive customer service is just one of the reasons why we're the fastest-growing USPS®-approved mailing systems vendor in the U.S.

EASYTAB

USPS® Compliant.

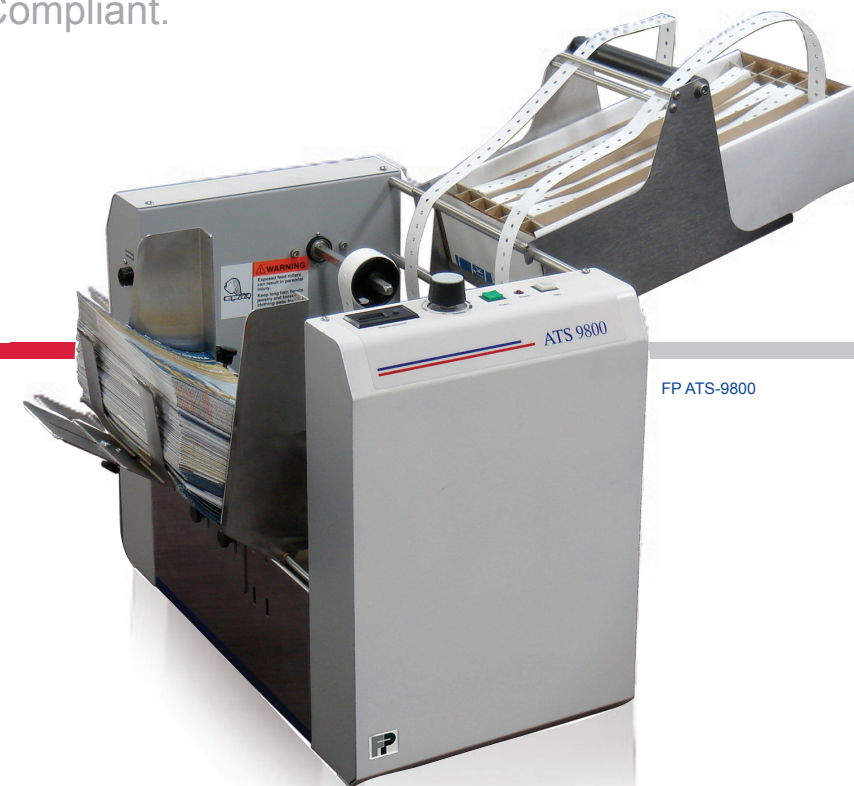

FP ATS-9800



FP ATS-8000



FP ATS-9600



FP ATS-8900



FP ATS-9900

Tabbing & Labeling Systems

TAKE ADVANTAGE OF SHAPE-BASED PRICING POSTAL DISCOUNTS

Automate your mailing operations with time-saving labeling, tabbing, and stamping technology. When it comes to staying abreast of the latest USPS® regulations, you can count on FP Mailing Solutions to provide the *right* solutions. FP's complete selection of Tabbing, Labeling, and Stamping Systems ensures you'll find the right machine for your business, so you save time and money. And, with these mail sealing systems, you can effortlessly take advantage of Shape-Based Pricing postal discounts while applying labels and tabs to your mail pieces with ease and efficiency. Every model boasts three critical "must-haves" in mail sealing systems: incredible speed, versatility to accommodate a range of materials, and durability and toughness for long-life operation.

FP Mailing Solutions
140 N. Mitchell Ct., Suite 200
Addison, IL 60101-5629
800.341.6052
www.fp-usa.com

BR1009

 **MAILINGSOLUTIONS**
AN FP GROUP COMPANY


www.amasti.com

PHONE: WV 304.232.1755
PA 724.695.1133
Toll Free 866.944.MAIL (6245)
FAX: 304.232.1899
EMAIL: sales@amasti.com

 **MAILINGSOLUTIONS**
AN FP GROUP COMPANY

FP ATS-8000

KEY ADVANTAGES

This fixed-speed, single tabber gives you all the advantages and cost savings of high-speed tabbing in one compact and economical unit. Every tab — paper, translucent, or clear — is a tight, secure seal, which helps to meet USPS® requirements. Its exceptionally large 17.0" material width capacity is unmatched in the industry.

SPECIAL FEATURES

- Tab sensitivity control adjusts for density in tab/wafer seals
- Accepts rolls of up to 5,000 tabs
- Feeder utilizes integrated bottom feed for continuous operation
- Optional CD-860 conveyor-stacker and drop tray



SPECIFICATIONS

Speed	12,000 pcs./hr. (8.5" tri-folds)
Media Size	3.0" to 17.0" L x 5.0" to 11.0" W
Media Thickness	Up to 5/32"
Tab Size	1 1/4" to 1 1/2" (standard tabs)
Reel Capacity	Up to 10.0" diameter (3.0" core)
Dimensions	25.0" W x 15.5" D x 22.0" H
Weight	40 lbs.
Electrical	120 VAC 50/60 Hz
Duty Cycle	30 million pieces total or 500,000 pcs./mo. (5-year life)

FP ATS-9600 & FP ATS-9700

KEY ADVANTAGES

Unlike most tabbers in their class that can only output paper tabs, the fast and versatile [FP ATS-9600](#) high-speed labeler/tabber and [FP ATS-9700](#) labeler/tabber/stamp affixer handle up to 25,000 pcs./hr. on a typical tri-fold mailer. These units apply clear, translucent, or paper tabs with ease in a variety of tab sizes, and can apply labels over 4.0" wide. Tab rolls keep jobs running longer. The [FP ATS-9700](#) applies USPS® pressure-sensitive roll stamps on pieces up to 9.5".

FP ATS-9600 SPECIAL FEATURES

- Runs clear, translucent, and paper tabs at speeds of up to 25,000 pcs./hr. on a typical tri-fold mailer
- Accurate labeling to within 1/16"
- Top-load, friction bottom feeder for continuous operation
- Optional CD-860 conveyor-stacker and drop tray

FP ATS-9700 SPECIAL FEATURES

- Tab/label media sensor adjusts to various types of materials
- Cantilevered head allows the unit to run wider materials
- Top-load, friction bottom-feed feeder
- Optional CD-860 conveyor-stacker and drop tray



SPECIFICATIONS

Speed	Tabbing up to 25,000 pcs./hr. (tri-folds) Labeling up to 25,000 pcs./hr. (#10s) Stamping (FP ATS-9700) up to 8,000 pcs./hr. (#10s)
Media Size	Minimum 3 5/8" W x 5.0" L Maximum 16.0" W x 18.0" L
Media Thickness	Up to 5/16" (up to 1/8" for tabbing)
Tab Size	5/8" to 1 1/2" (standard tabs)
Reel Capacity	Up to 10.0" diameter (3.0" core)
Tab Accuracy	+/- 1/16"
Hopper Capacity	250 #10 envelopes
Dimensions	16.5" W x 19.0" H x 18.0" L
Weight	70 lbs.
Electrical	110 VAC 60 Hz/2A
Duty Cycle	30 million pieces total or 500,000 pcs./mo. (5-year life)

FP ATS-9800

KEY ADVANTAGES

Apply one or two tabs with this pin-feed, dual tabber — and get more done in less time! This versatile and affordable model offers double-tab throughput speeds of up to 22,000 pcs./hr. on tri-folded mailers. The built-in feeder runs a wide variety of materials up to 1/8" thick and has a detachable hopper so it can even be used in-line.

SPECIAL FEATURES

- Built-in friction feeder holds up to 300 mailers
- Detachable hopper enables in-line use
- Complies with USPS® bulk mail regulations for folded mailers
- Optional CD-860 conveyor-stacker and drop tray



SPECIFICATIONS

Speed	Tabbing up to 22,000 pcs./hr. (1 or 2 tabs, 8.5" x 11" tri-folds)
Media Size	Minimum 5.5" W x 3.5" L Maximum 12.0" W x 9.0" L (with built-in feeder)
Media Thickness	Up to 1/8"
Tab Size	Minimum 1 3/16" W x 1 3/16" L Maximum 1 3/16" W to 1 5/16" L
Reel Capacity	25,000 Tab Box
Tab Accuracy	+/- 1/16"
Hopper Capacity	300 tri-folded mailers
Dimensions	10.5" W x 15.0" H x 19.0" L
Weight	40 lbs.
Electrical	110 VAC 60 Hz/1A (optional 220 VAC 50 Hz/1A)
Duty Cycle	30 million pieces total or 500,000 pcs./mo. (5-year life)

FP ATS-8900

KEY ADVANTAGES

This multiple tabber/stamp affixer is the only machine available in its price range that tabs 1 to 3 tabs or stamps in-line. Capable of handling medium range production consistently, reliably, and quickly, it works at speeds of up to 25,000 pcs./hr., placing accurate and tight closed tabs. Friendly firmware enables easy setup and smooth operation.

SPECIAL FEATURES

- Innovative side tabbing enables greater consistency and speed
- In-line or built-in feeder for stand-alone applications
- Places up to 3 tabs per piece according to USPS® regulations
- Optional CD-860 conveyor-stacker and drop tray
- Optional FF-20 friction feeder (shown above)



SPECIFICATIONS

Speed	Tabbing up to 25,000 pcs./hr. (1 tab) Up to 15,000 pcs./hr. (2 tabs) Up to 10,000 pcs./hr. (3 tabs)
Production Rates	Calculated with tri-fold 8 1/2" x 11"
Stamping	Up to 8,000 pcs./hr. (#10s)
Media Size	Minimum 5.0" W x 3.0" L Maximum 17.0" W x 13.0" L (Detachable Feeder 17.0" W x 12.0" L)
Media Thickness	Up to 3/8"
Tab Size	Minimum 3/4" Maximum 1 1/2"
Reel Capacity	16.0" diameter 20,000 1" diameter tabs
Tab Accuracy	+/- 1/16"
Dimensions	25.0" W x 27.0" H (with reel) x 41.0" L (with feeder)
Weight	70 lbs.
Electrical	110 VAC 60 Hz/2A