



Integrated bottom feed for continuous operation

The Formax **FD 262 Single-Head Tabber** makes quick work of applying tabs to folded mailpieces, and is designed to meet all USPS requirements for mailing and automation discounts. Using “crash tab” technology, the open edge of a mailpiece contacts an adhesive tab and travels through a set of rollers where the tab is tightly folded and sealed, creating a mail-ready piece.


The FD 262 tabs **up to 12,000 pieces per hour** (8 1/2” tri-folds), and handles media up to 17” wide, up to 5/32” thick. Its advanced design includes an **integrated bottom feeder** allowing for continuous operation, and a built-in waste take-up spool to reduce down time. The user-friendly controls include a 5-digit resettable LCD counter and a tab sensitivity control to adjust for tab stock density.

Various tab stocks can be used, including translucent, paper and clear, in sizes up to 1 1/2” in diameter. To meet USPS requirements, the mailpiece can be fed through in different directions, to apply tabs in various locations, (see below). The optional **FD 282-30 3-foot Conveyor** offers adjustable speed from 0 - 124 fpm, and stacks tabbed pieces in a neat, sequential order for easy removal.

With ever-changing postal regulations, having the dependable, efficient FD 262 can make your mailings compliant with very little effort.

#### Various Tabbng Positions

Feed Direction



One Pass



Two Passes




Three Passes

## FD 262 Tabber Specifications

Speed:	Up to 12,000 pieces per hour (8.5" tri-folds)
Feeder Capacity:	Up to 200 tri-folds Integrated bottom feeder for continuous operation
Media Size:	3" to 18" L 5" to 17" W
Media Thickness:	Up to 5/32"
Tab Size:	5/8" to 1 1/2"
Tab Materials:	Translucent, Paper, Clear
Tab Sensitivity Control:	Adjusts for density in tab/wafer seals
Tabs Applied:	1 tab per pass
Tab Roll Capacity:	Up to 10,000 tabs
Tab Roll Size:	Maximum roll diameter: 9" Core diameter: 3"
Counter:	5-digit LCD, resettable
Duty Cycle:	Up to 30 million addresses or 500,000 per month over a 5-year cycle
Dimensions:	25" W x 22" H x 15.5" D
Weight:	40 lbs
Power:	120VAC, 50/60Hz
Options:	Drop-Stacking Conveyor Stacker
Made in USA	



Simple, push-button controls and resettable LCD counter

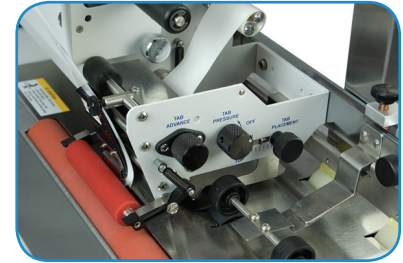

Easily accessible knobs for tab placement and adjustment



Applicator and rollers ensure tab is tightly folded and sealed

## FD 282-30 Drop-Stacking Conveyor

Speed:	0-124 feet per minute
Document Sizes:	Up to 9" W x 12" L
Belts:	Four, each 1" wide
Drop Stack Capacity:	Up to 250 envelopes
Direction:	Left-to-right or right-to-left configurations
Dimensions:	50" L x 14 1/2" D x 6 1/2" H
Made in USA	



FD 282-30 Drop-Stacking Conveyor

Formax - New Hampshire, USA  
www.formax.com

Local Dealer: